GAGGENAU



Vario 200 series induction cooktop
VI 230

VI 230 620
Black aluminum control panel.
Width 12″ (28 cm).
Surface installation only.

Included accessories

1 glass scraper.

Installation accessories

VV 200 010
Stainless steel connection strip for combination with other Vario appliances of the 200 series

VV 200 020
Black connection strip for combination with other Vario appliances of the 200 series.

Optional accessories

VD 200 020
Black appliance cover.

Combinable with:

VL 200 120
AW 442 720
AI 230 700
AW 230 790
AF 210 791

Good to know:

Wall installations require the hood to be as large as the cooktop(s). Island installations require the hood to be larger than the cooktop(s).

Highlights
— Can be combined with other Vario 200 series products.
— Control panel for comfortable and secure operation.

Cooking zones
1 induction cooking zone 8 ¼″ (21) (2,200 W, with booster 3,700 W)
1 induction cooking zone 6″ (15) (1,400 W, with booster 1,800 W)

Operation
Control knobs with illuminated ring.
Integrated control panel.
Electronic power control in 9 output levels.

Features
Cooking area marking.
Frying sensor function.
Pot detection.
Booster function for both cooking zones.


Safety
Residual heat indication.
Operation indicator.
Safety shut-off.

Planning notes
Operates with magnetic (induction) iron pots and pans only. For an optimal heat distribution, the use of flat bottom cookware is recommended.
To insure that the appliance works correctly, the cooktop must be sufficiently ventilated either from the rear or base of the cabinet.
Appliance can be snapped into the countertop from above.
Appliance weight: approx. 15.4 lbs (7 kg).

Please read additional planning notes on pages 98–99.

Please read the installation details regarding air ducting on page 127.

Rating
Total rating: 3,200 W (208/220 V) / 3,700 W (240 V).
Total amps: 15.
Electrical: 208 / 220–240 V / 60 Hz.
Electrical connection:
Hardwire required, 37″ cable length.

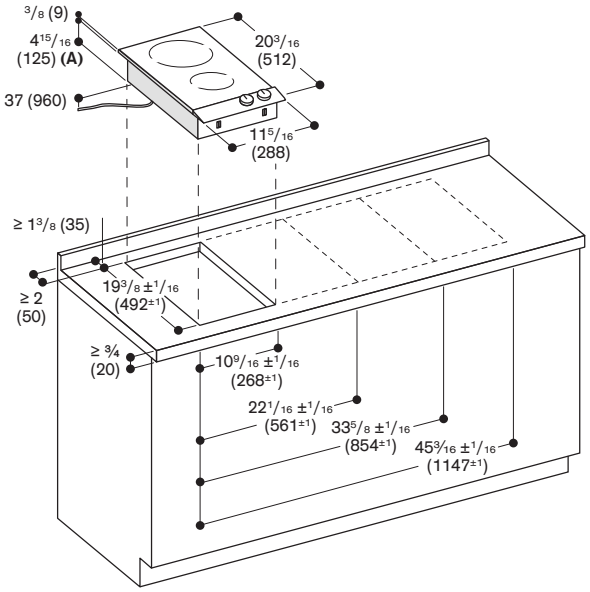

A: Installation depth:
Appliance depth 2 3/4" (70 mm) + air flow

Numbers indicated inside parenthesis ( ) = mm

www.gaggenau.com/us
Revised: July 2026

PFAS

Gaggenau reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Consult the product's installation instructions for final dimensional data and other details prior to making cut out. Warranties: Please see Use & Care manual or Gaggenau website for statement of limited product warranty. For more information on our entire line of products, go to www.gaggenau.com or call 1-877-442-4436.