

**Series 2, Wall-mounted canopy
rangehood, 90 cm, Stainless steel
DWP96BC50A**



DHZ1224	Chimney extension 500 mm
DHZ1234	Chimney extension 750 mm
DHZ5275	Standard recirculation kit
DHZ5276	Standard odor filter (replacement)
DHZ9550	Brushed steel back panel
DHZ9551	Brushed steel back panel

**Canopy hood: perfect performance
matching your kitchen.**

• 3-Speed Power Level Options To Suit Your Cooking Style And Recipes

Color chimney:	Stainless steel
Typology:	Wall-mounted
Length electrical supply cord:	130.0 cm
Height of the chimney:	553-730/573-730 mm
Height of product, without chimney:	246 mm
Minimum distance above an electric cooktop:	600 mm
Minimum distance above a gas cooktop:	650 mm
Net weight:	10.1 kg
Type of control:	mechanical
Number of power settings:	3
Max. air extraction:	626 m ³ /h
Max. air recirculation:	409 m ³ /h
Number of lights:	2
Noise level:	69 dB(A) re 1pW
Diameter of air outlet:	120 / 150 mm
Grease filter material:	Washable aluminium
EAN code:	4242005100651
Connection rating:	220 W
Fuse protection:	10 A
Voltage:	220-240 V
Frequency:	50; 60 Hz
Plug type:	AU plug
Installation typology:	Wall-mounted



Series 2, Wall-mounted canopy rangehood, 90 cm, Stainless steel DWP96BC50A

Canopy hood: perfect performance matching your kitchen.

Design & Innovation

- Pyramid design
- Appliance colour: Stainless steel

Power and Mode of Operation

- Accessory required for recirculation mode: Standard recirculation kit
- 3 power settings via Push button
- Push button for power and light
- Extraction rate exhaust air according to EN 61591: max. 626 m³/h
- Extraction rate in recirculation mode: Max. normal use: 409 m³/h
- Suitable for ducted or re-circulated extraction
- Twin channel high performance fan motor
- Noise min./max. Normal Level: 51/69 dB
- Noise level in recirculation mode:
- Max. normal use: 75 dB(A) re 1 pW (62 dB(A) re 20 µPa sound pressure)


Comfort & Convenience

- Dishwasher safe Metal grease filters
- 2 x 1.5W LED
- with one-way flap: prevents outside air from entering your kitchen

Technical Information

- Appliance width: 900 mm
- Dimensions exhaust air (HxWxD): 799-975 x 900 x 500 mm
- Dimensions recirculating (HxWxD): 799-975 x 900 x 500 mm
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Electrical cable length 1.3 m


Series 2, Wall-mounted canopy rangehood, 90 cm, Stainless steel DWP96BC50A

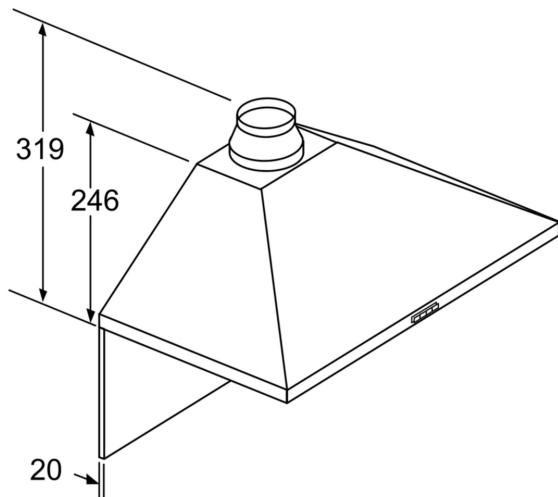

If a back panel is used,
the design of the appliance
must be considered.

measurements in mm

Measurements in mm

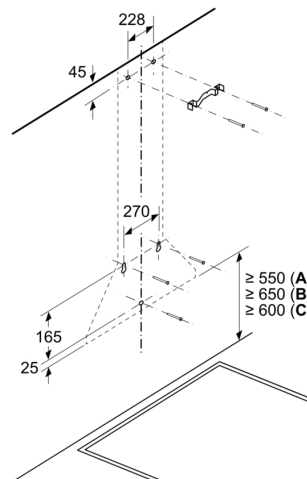


A: Electric

B: Gas - from upper edge of pan support

C: Electric - for Australia and New Zealand

Measurements in mm

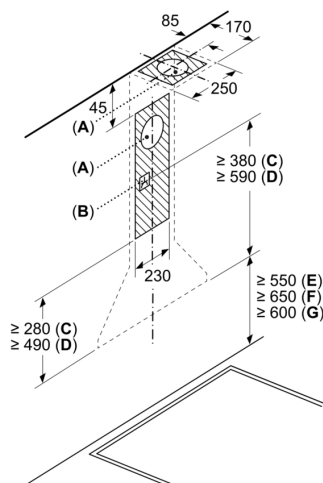

A: Exhaust-air outlet

B: Socket


C: Exhaust air

D: Circulated air

E: Electric

F: Gas - from upper edge of pan support

G: Electric - for Australia and New Zealand

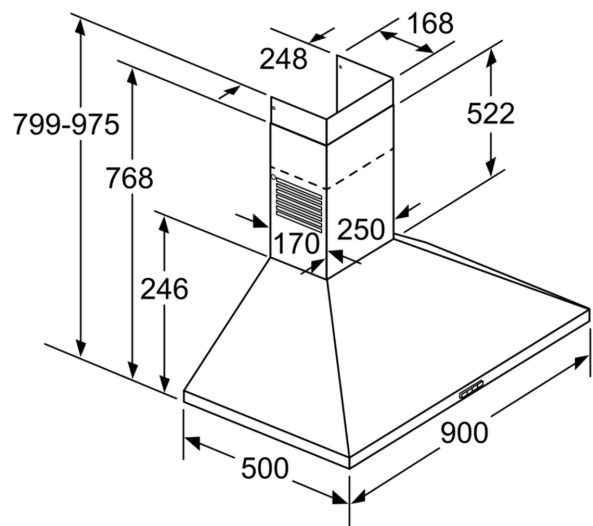

measurements in mm