


## iQ500, Gas hob, 90 cm, Stainless steel EC9A5SB90

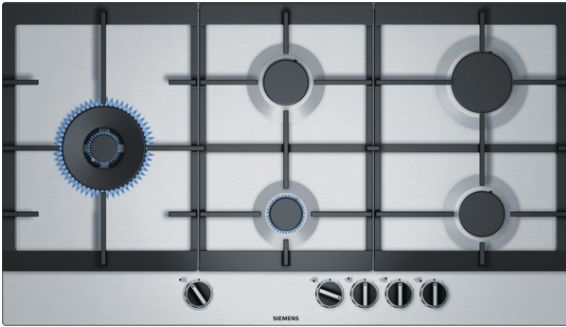

The gas hob with stepFlame Technology for precise flame control in nine steps.

- ✓ stepFlame Technology – Precise flame control with nine different settings.
- ✓ Dual Wok Burner 5 kW – Go from simmer to stir-fry on one burner.
- ✓ High-quality materials and workmanship – continuous cast-iron pan supports.
- ✓ Biomethane ready – Power your gas hob with renewable biomethane gas.
- ✓ The extremely convenient sword knob makes it easy to control and monitor the power level selected.

### Features

#### Technical Data

Product name/family : gas hob w integrated controls

Construction type : Built-in

Energy input : Gas

Total number of positions that can be used at the same time : 5

Type of control setting devices : sword knobs

Min. required niche size for installation (HxWxD) : 45 x 850-852 x 490-502 mm

Width of the appliance : 915 mm

Dimensions of the packed product (HxWxD) : 165 x 1116 x 659 mm

Net weight : 19.5 kg

Gross weight : 19.5 kg

Residual heat indicator : without

Location of control panel : Hob front

Basic surface material : Stainless steel

Color of surface : Stainless steel

Length of electrical supply cord : 150 cm

EAN code : 4242003742259

Gas connection rating : 12500 W

Fuse protection : 3 A

Voltage : 220-240 V

Frequency : 60; 50 Hz



4 242003 742259

## iQ500, Gas hob, 90 cm, Stainless steel EC9A5SB90

### Features

#### Design

- Stainless steel surface
- Cast iron pan supports

#### Usage convenience

- Step Flame technology - 9 steps: precisely control and adjust the flame in nine defined levels.
- Design co-ordinated control dials: easily access dials in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the dials to ignite the flame.

#### Burners and power

- 5 burner gas hob including:
- Including 1 dual control wok burner: use an extra wide power range, separately controlling two flame rings.
- Left: Wok burner up to 5 KW (depending on gas type)
- Center front: Economy burner up to 1 KW (depending on gas type)
- Center rear: standard burner up to 1.75 KW (depending on gas type)
- Right rear: High-speed burner up to 3 KW (depending on gas type)
- Right front: Standard burner up to 1.75 KW (depending on gas type)

#### Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.

#### Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 53 x 915 x 520
- Required niche size for installation (HxWxD mm) : 45 x 850 x (490 - 502)
- Min. worktop thickness: 30 mm
- Power cord: 1.5 m
- Connected load: 12.5 KW

iQ500, Gas hob, 90 cm, Stainless steel  
EC9A5SB90

Dimensioned drawings

