


iQ500, Induction hob, 60 cm,  
Black, surface mount without  
frame  
ED651FSB1E

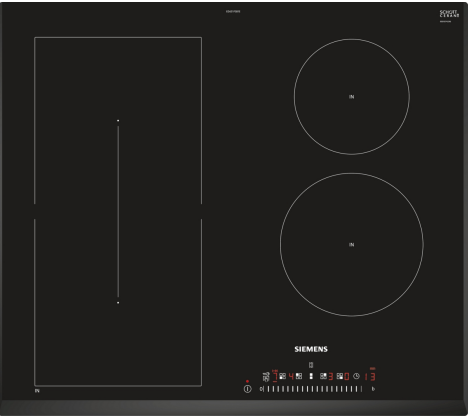

Optional accessories

HZ390090	Wok Set consisting of 3 Items
HZ95E030	Set of 2 pots and 1 pan

Induction hob with innovative features that enable highly flexible cooking in any situation.

- ✓ The touchSlider allows the hob temperature to be controlled by entering it directly or by moving the slider with a single finger.
- ✓ Shorter heating times with up to 50% more power thanks to the powerBoost function.
- ✓ Safely shuts off the cooking zone - Timer with switch-off function.

Features

Technical Data

Product name/family: ..... Cooking zone ceramic  
Built-in / Free-standing: ..... Built-in  
Energy input: ..... Electric  
Number of cooking zones: ..... 4  
Required niche size for installation (HxWxD): ..... 51 x 560-560 x 490-500 mm  
Width of the appliance: ..... 592 mm  
Dimensions: ..... 51x592x522 mm  
Dimensions of the packed product (HxWxD): ... 126 x 753 x 603 mm  
Weight: ..... 13.2 kg  
Gross weight: ..... 13.6 kg  
Residual heat indicator: ..... Separate  
Location of control panel: ..... Lateral  
Basic surface material: ..... Ceramic  
Color of surface: ..... Black  
Length electrical supply cord: ..... 110.0 cm  
EAN code: ..... 4242003715925  
Nominal power: ..... 220-240 V  
Frequency: ..... 50; 60 Hz



iQ500, Induction hob, 60 cm,  
Black, surface mount without  
frame  
ED651FSB1E

Features	
<p><b>Control:</b></p> <ul style="list-style-type: none"><li>• touchSlider control</li></ul> <p><b>Special features</b></p> <ul style="list-style-type: none"><li>• combiZone</li><li>• 4 induction cooking zones</li><li>• reStart function</li><li>• Timer for all zones Acoustic Signal</li><li>• 17 power levels</li><li>• Power boost setting</li><li>• Energy Consumption Display</li></ul> <p><b>Safety Features</b></p> <ul style="list-style-type: none"><li>• Automatic pan recognition Automatic safety switch off Control panel lock Control panel pause</li><li>• 2 stage residual heat indicators</li><li>• Main on/off switch</li></ul> <p><b>Power and size:</b></p> <ul style="list-style-type: none"><li>• Cooking zones: 1 x Ø 210 mm, 2.2 KW (max. Power levels 3.7 KW)</li><li>Induction; 1 x Ø 210 mm, 2.2 KW (max. Power levels 3.7 KW)</li><li>Induction; 1 x Ø 145 mm, 1.4 KW (max. Power levels 2.2 KW)</li><li>Induction; 1 x Ø 180 mm, 1.8 KW (max. Power levels 3.1 KW)</li><li>Induction</li></ul> <p><b>Technical information</b></p> <ul style="list-style-type: none"><li>• Installation measurements: 560 mmx490 mm</li><li>• Min. worktop thickness: 16 mm</li><li>• Connected load: 6.9 KW</li><li>• Connection cable 110 cm</li><li>• Cable included in packaging</li></ul>	

iQ500, Induction hob, 60 cm,  
Black, surface mount without  
frame  
ED651FSB1E

Dimensioned drawings

min. 550

Measurements in mm

measurements in mm

**A:** Minimum distance from the hob cut-out to the wall.  
**B:** Recessed depth.  
**C:** The clearance between the surface of the worktop and the top of the front of the oven must be 30 mm. See space requirements for the oven.

The worktop into which the hob is installed must withstand loads of approx. 60 kg; suitable substructures must be used if required.

D	E	F
585-600	50	≥ 35
> 600	≥ 50	≥ 50

min. 65

min. 45

20

①

① Ventilation gap must be present.

Measurements in mm

min. 45

20

①

① Ventilation gap must be present

All measurements in mm