

**Series 4, built-in fridge-freezer with  
freezer at bottom, 177.2 x 54.1 cm,  
flat hinge  
KIV87VFE0G**



**Optional accessories**

KSZB6R00 Bottle Rack  
KSZGGM00 Butter box

**The spacious built-in fridge-freezer  
combination with VitaFresh XXL keeps  
food fresh for longer.**

- **VitaFresh XXL:** the extra-large, climate-controlled fridge drawer for fruit and vegetables.
- **Eco Airflow:** maintains optimal air circulation and a constant temperature level throughout the cooling area.
- **Low Frost:** defrost less often thanks to reduced frost – saving time, effort and energy.
- **High-stability door trays:** extra high and flexible for more space and stability.
- **LED lighting - with soft start, lasts for the lifetime of the appliance.**

**Technical Data**

Energy Efficiency Class: ..... E  
Average annual energy consumption in kilowatt hour per year  
(kWh/a): ..... 216 kWh/annum  
Sum of volume of frozen compartments: ..... 70 l  
Sum of volume of chill compartments: ..... 200 l  
Airborne acoustical noise emissions : ..... 35 dB(A) re 1 pW  
Airborne acoustical noise emission class: ..... B  
Built-in / Free-standing: ..... Built-in  
Door panel options: ..... Not possible  
Height: ..... 1772 mm  
Width of the appliance: ..... 541 mm  
Depth: ..... 548 mm  
Min. required niche size for installation (HxWxD): 1775.0 x 560 x 550 mm  
Net weight: ..... 53.3 kg  
Fuse protection: ..... 10 A  
Door hinge: ..... Right reversible  
Voltage: ..... 220-240 V  
Frequency: ..... 50 Hz  
Length electrical supply cord: ..... 230.0 cm  
Number of compressors: ..... 1  
Number of independent cooling systems: ..... 1  
Interior ventilator: ..... No  
Reversible Door Hinge: ..... Yes  
Number of Adjustable Shelves in fridge compartment: ..... 4  
Shelves for Bottles: ..... Yes  
Frost free system: ..... No  
Installation typology: ..... Integrated



## Series 4, built-in fridge-freezer with freezer at bottom, 177.2 x 54.1 cm, flat hinge KIV87VFE0G

- Noise Level : 35 dB
- Temperature rise time : EU19\_Temperature rise time\_D: 12 H

**The spacious built-in fridge-freezer combination with VitaFresh XXL keeps food fresh for longer.**

- KIV87VFE0G
- easy Installation

### Functions

- Bright interior LED fridge light

### Design features

- LED electronic control
- SuperFreezing function with automatic deactivation
- Optical and acoustical door open warning

### Design features

- 5 safety glass shelves in fridge compartment of which 4 are height adjustable
- 1 removable door storage compartments.
- 4 door bins

### Freshness System

- 1 VitaFresh drawer with humidity control - Fruits and vegetables retain vitamins and stay fresh for longer

### Food freshness system

- LowFrost - less ice creation and therefore quicker defrosting
- 2 transparent freezer drawers, including 1 BigBox

### Dimension and installation

- Dimensions: 177.2 cm H x 54.1 cm W x 54.8 cm D
- Niche Dimensions: 177.5 cm H x 56 cm W x 55 cm D

### Key features - Fridge section

- Right hinged door, reversible door
- 220 - 240 V

### Key features - Freezer section

- 3 x egg tray, 1 x ice cube tray

### Country Specific Options

- Based on the results of the standard 24-hour test. Actual consumption depends on usage/position of the appliance.

### Design features

### Dimension and installation



### Additional features

### Performance and Consumption



- EU19\_EEK\_D: E
- Total Volume : 270 l
- Net Fridge Volume : 200 l
- Net Freezer Volume : 70 l
- Net 4\* compartment volume : 70 l
- Freezing capacity 24h : 3.2 kg
- Annual Energy Consumption: 216 kWh/a
- Climate Class: SN-ST

**Series 4, built-in fridge-freezer with  
freezer at bottom, 177.2 x 54.1 cm,  
flat hinge  
KIV87VFE0G**

measurements in mm

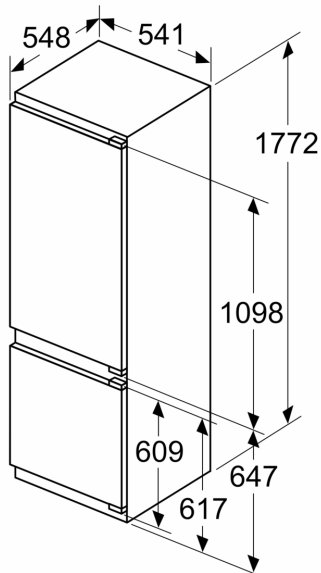

A: Air inlet  $\geq 200 \text{ cm}^2$ ; Ventilation options  
B: Air outlet  $\geq 200 \text{ cm}^2$ ; Ventilation options

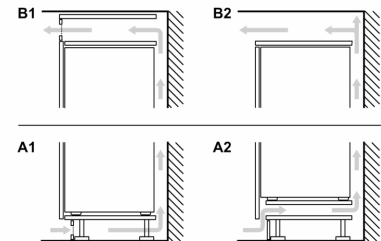

**Maximal permissible weight of the unit fronts**

Fitted unit fronts that exceed the permissible weight may cause damage and result in functional impairment of the hinges

$\Delta$  Weight


A: Appliance door height including hinges in mm


B: Undamped hinge, unit front in kg

C: Damped hinge, unit front in kg

D: Additional possible load in kg with heavy load kit

A	B	C	D
1500-1750	22	22	
720-1400	19	19	B+5 / C+5
A1	15	19	
A2	15	19	

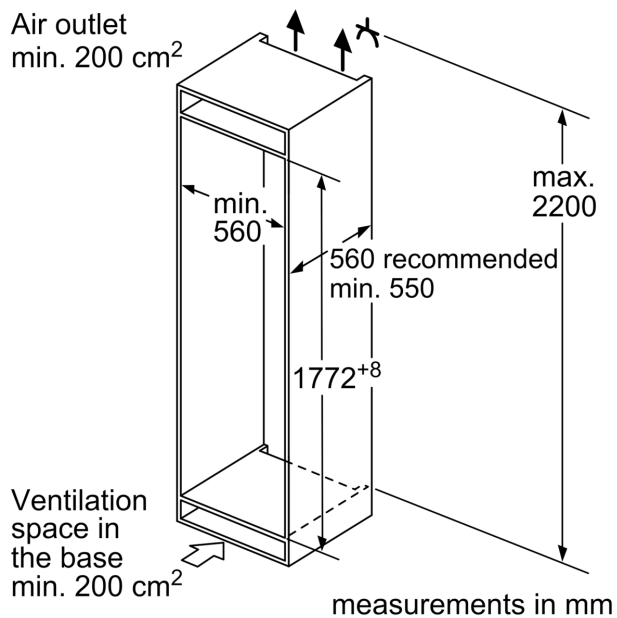


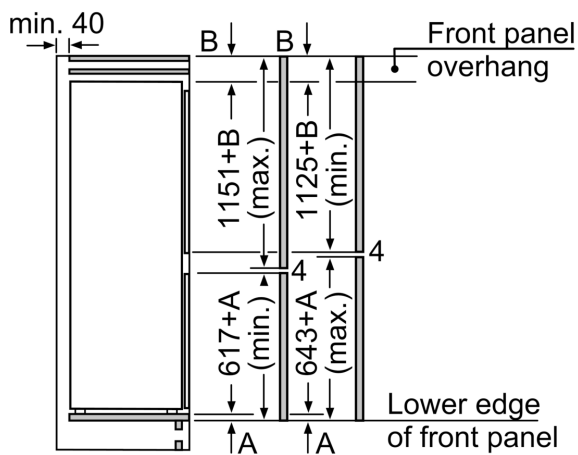

The specified unit door dimensions are valid for a door gap of 4 mm.

measurements in mm

measurements in mm  
Recommended gap dimensions for flat hinges



F	R	X
16-19	0-3	2.5
20	0-1	3
	2-3	2.5
21	0-1	3
	2-3	2.5
22	0	4
	1	3.5
	2-3	3

The gap dimensions recommended in the table must be adhered to in order to ensure that appliance doors do not collide with anything when they are opened, and to avoid causing damage to kitchen units.