

Series 8, Domino Gas hob, 30 cm, , PRB3A6B70



The domino gas hob with FlameSelect: achieve perfect cooking results thanks to nine precisely defined power levels.

- **FlameSelect:** adjust the gas flame precisely using nine defined levels.
- **Heavy-duty continuous surface grates can be easily and quickly cleaned in the dishwasher.**
- **Continuous cast-iron pan support: for high firmness and stability of cookware.**
- **Biomethane-ready: your gas hob can also be powered with renewable biomethane gas.**
- **Sword knobs: for an ergonomic control.**

Product name/family: Vario/Domino gas hob w control
 Built-in / Free-standing: Built-in
 Energy input: Gas
 Total number of positions that can be used at the same time: 2
 Min. required niche size for installation (HxWxD): 45 x 270 x 490-500 mm
 Width of the appliance: 306 mm
 Dimensions: 47 x 306 x 527 mm
 Dimensions of the packed product (HxWxD): 190 x 380 x 580 mm
 Net weight: 7.0 kg
 Gross weight: 7.9 kg
 Residual heat indicator: No
 Location of control panel: Front
 Basic surface material: Ceramic
 Color of surface: Black, Alu, brushed
 Color of frame: Black
 Length electrical supply cord: 150.0 cm
 Connection rating: 1 W
 Gas connection rating: 4700 W
 Fuse protection: 3 A
 Voltage: 220-240 V
 Frequency: 50; 60 Hz

- HEZ298105 Simmer plate
- HEZ298114 Small pot support
- HEZ394301 Connecting strip



Series 8, Domino Gas hob, 30 cm, , PRB3A6B70

**The domino gas hob with FlameSelect:
achieve perfect cooking results thanks to
nine precisely defined power levels.**

Design

- ceramic glass surface, black
- Facette front, rear and side profiles, aluminum
- Cast iron continuous pan supports
- Special flat burner design: elegant burner design with less pieces

Usage convenience

- FlameSelect: precisely adjust the flame in nine defined and repeatable levels.
- Pan supports dishwasher proof: clean without effort in the dishwasher.
- Sword control knobs: easily access knobs in front with strong grip for effortless turning.
- 1 Hand ignition: just push and turn the knob to ignite the flame.

Burners and power

- 2 Gas burners
- Center front: Standard burner up to 1.9 KW (depending on gas type)
- Center rear: Rapid burner up to 2.8 KW (depending on gas type)

Safety


- Flame failure safety device: prevents unwanted gas flow when flame goes out.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Preset for natural gas (20mbar)
- Nozzle set for Liquid gas nozzles (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 47 x 306 x 527
- Required niche size for installation (HxWxD mm) : 45 x 270 x (490 - 502)
- Min. worktop thickness: 30 mm
- Power cord: 1.5 m
- Connected load: 4.7 KW


**Series 8, Domino Gas hob, 30 cm, ,
PRB3A6B70**

Measurements in mm

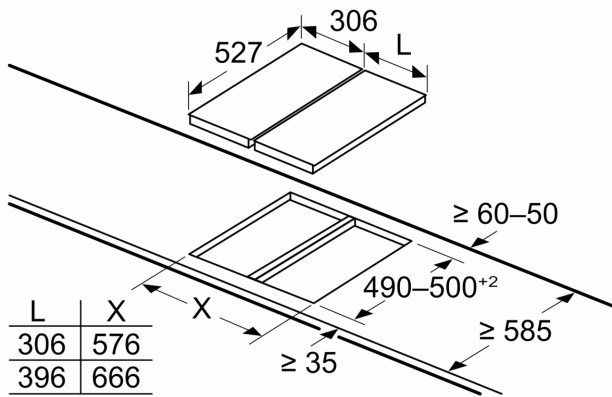


If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.)

Measurements in mm

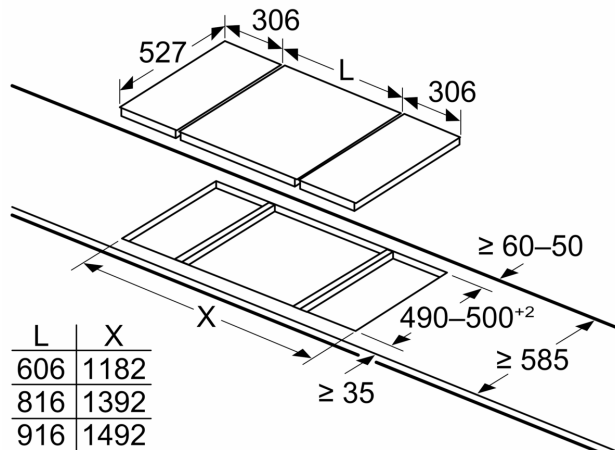


When installing two Domino units right next to a hob, two assembly kits (HEZ394301) are required

Measurements in mm

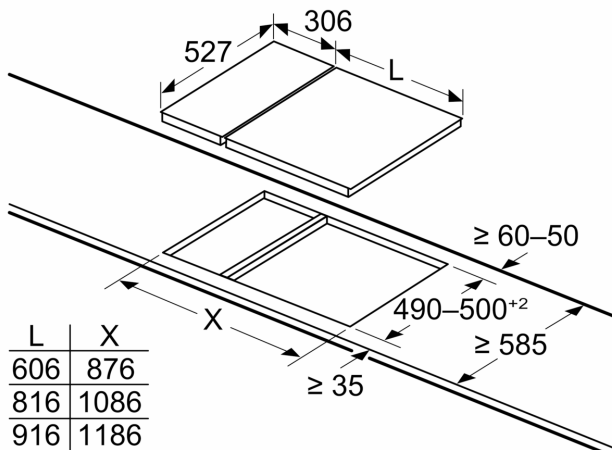


When installing two Domino units right next to a hob, two assembly kits (HEZ394301) are required

Measurements in mm

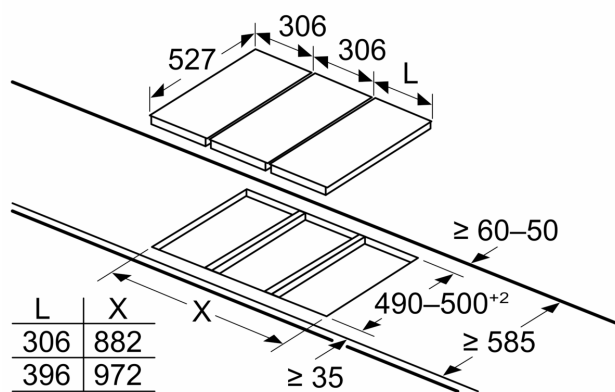

If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.)

Measurements in mm
Picture for the table Domino combination possibilities with corresponding devices and cutout dimensions

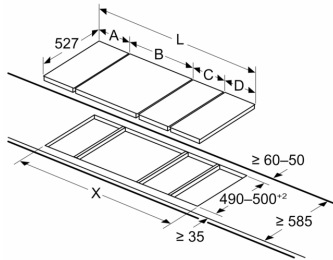

If two or more elements are installed right next to one another, one or several installation kits are required (2 elements 1 installation kit, 3 elements 2 installation kits, etc.)

Cutout dimension (X) depending on the combination (see combination table)


measurements in mm
 Domino combination options with corresponding appliance and cut-out dimensions

Width category:
 Appliance width:


| | A | B | C | D | L | X | | |
|-------------------|-----|-----|-----|-----|---|---|------|------|
| 2x30 | 306 | 306 | - | - | - | - | 612 | 576 |
| 1x30, 1x40 | 306 | 396 | - | - | - | - | 702 | 666 |
| 1x30, 1x60 | 306 | 606 | - | - | - | - | 912 | 876 |
| 1x30, 1x70* | 306 | 710 | - | - | - | - | 1016 | 980 |
| 1x30, 1x80 | 306 | 816 | - | - | - | - | 1122 | 1086 |
| 1x30, 1x90 | 306 | 916 | - | - | - | - | 1222 | 1186 |
| 2x40 | 396 | 396 | - | - | - | - | 792 | 756 |
| 1x40, 1x60 | 396 | 606 | - | - | - | - | 1002 | 966 |
| 1x40, 1x70* | 396 | 710 | - | - | - | - | 1106 | 1070 |
| 1x40, 1x80 | 396 | 816 | - | - | - | - | 1212 | 1176 |
| 1x40, 1x90 | 396 | 916 | - | - | - | - | 1312 | 1276 |
| 3x30 | 306 | 306 | 306 | - | - | - | 918 | 882 |
| 2x30, 1x40 | 306 | 306 | 396 | - | - | - | 1008 | 972 |
| 2x30, 1x60 | 306 | 306 | 606 | - | - | - | 1218 | 1182 |
| 2x30, 1x70* | 306 | 306 | 710 | - | - | - | 1322 | 1286 |
| 2x30, 1x80 | 306 | 306 | 816 | - | - | - | 1428 | 1392 |
| 2x30, 1x90 | 306 | 306 | 916 | - | - | - | 1528 | 1492 |
| 1x30, 2x40 | 306 | 396 | 396 | - | - | - | 1098 | 1062 |
| 1x30, 1x40, 1x60 | 306 | 396 | 606 | - | - | - | 1308 | 1272 |
| 1x30, 1x40, 1x70* | 306 | 396 | 710 | - | - | - | 1412 | 1376 |
| 1x30, 1x40, 1x80 | 306 | 396 | 816 | - | - | - | 1518 | 1482 |
| 1x30, 1x40, 1x90 | 306 | 396 | 916 | - | - | - | 1618 | 1582 |
| 2x40, 1x60 | 396 | 396 | 606 | - | - | - | 1398 | 1362 |
| 4x30 | 306 | 306 | 306 | 306 | - | - | 1224 | 1188 |
| 3x30, 1x40 | 306 | 306 | 306 | 396 | - | - | 1314 | 1278 |
| 1x30, 1x75 | 306 | 750 | - | - | - | - | 1056 | 1020 |
| 1x40, 1x75 | 396 | 750 | - | - | - | - | 1146 | 1110 |
| 2x30, 1x75 | 306 | 306 | 750 | - | - | - | 1362 | 1326 |
| 1x30, 1x40, 1x75 | 306 | 396 | 750 | - | - | - | 1452 | 1416 |

* Not possible with 70 cm induction hob

Measurements in mm
Assembly kit (HEZ394301) for Domino

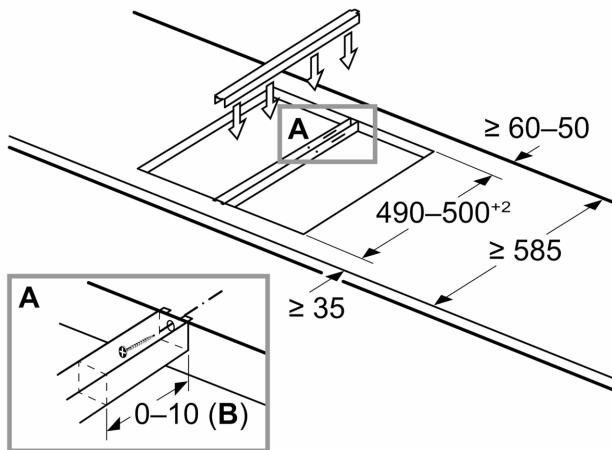

B: Dependent on the cut-out depth

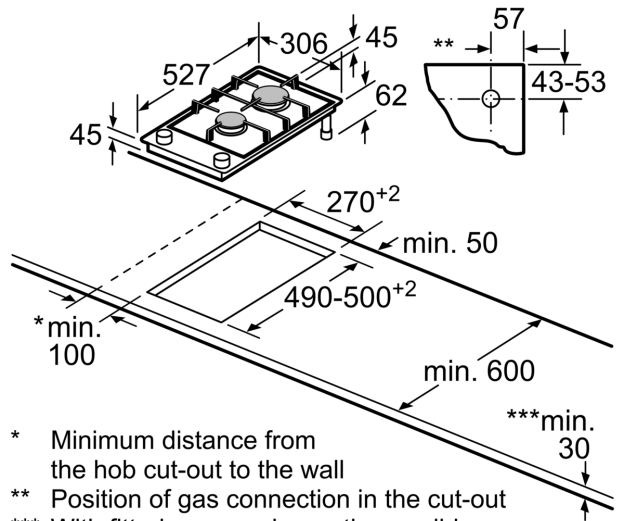

- * Minimum distance from the hob cut-out to the wall
- ** Position of gas connection in the cut-out
- *** With fitted oven underneath, possibly more; see space requirements for the oven

measurements in mm