


**iQ700, Gas Hob, 60 cm, Ceramic,
Black
ER6A6PD70**

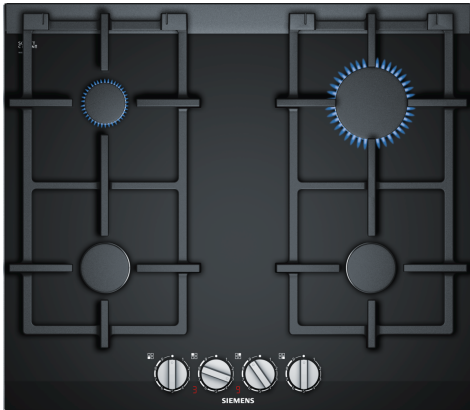

HZ298105	Simmer plate
HZ298114	Small pot support

Gas cooktop with stepFlame Technology for precise flame control in nine steps.

- ✓ stepFlame Technology: precise heat control with nine different flame steps.
- ✓ Dishwasher proof pan supports are extremely easy to remove and clean in the dishwasher. Cut down the time you spend cleaning the hob.
- ✓ High-quality materials and workmanship – continuous cast-iron pan supports.
- ✓ Design burner – extremely flat in comparison to standard burner.
- ✓ Extremely heat-resistant and easy to clean – the modern glass ceramic surface.

Technical specifications

Product name/family: gas hob w
integrated controls
 Design: Built-in
 Type of heating: Gas
 Total number of positions that can be used at the same time: 4
 Type of control setting devices: sword knobs
 Min. required niche size for installation (HxWxD):45 x 560-562 x
490-502 mm
 Width of the appliance: 602 mm
 Dimensions:47 x 602 x 520 mm
 Dimensions of the packed product (HxWxD): ... 165 x 677 x 579 mm
 Net weight: 11.3 kg
 Gross weight: 12.5 kg
 Residual heat indicator:yes
 Location of control panel: Front
 Basic surface material: Ceramic
 Color of surface: Black, Alu, brushed
 Color of frame: Black
 Length electrical supply cord: 100.0 cm
 EAN code:4242003742754
 Gas connection rating: 7700 W
 Fuse protection:3 A
 Voltage:220-240 V
 Frequency:60; 50 Hz



iQ700, Gas Hob, 60 cm, Ceramic, Black ER6A6PD70

Design

- ceramic glass surface, black
- Facette front, rear, side profiles, aluminium, brushed
- cast iron pan support
- BSH flat burner: elegant burner design with less pieces

Comfort & Convenience

- Step valve 9 steps: precisely adjust the flame in nine defined and repeatable levels.
- Electronic power level display: see the selected power level and the residual heat.
- yes: clean without effort in the dishwasher.
- Sword Knobs: easily access knobs in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the knob to ignite the flame.

Burners and power

- 4 PC
- Left front: Standard burner up to 1.9 KW (depending on gas type)
- Left rear: Economy burner up to 1.1 KW (depending on gas type)
- Right rear: High speed burner up to 2.8 KW (depending on gas type)
- Right front: Standard burner up to 1.9 KW (depending on gas type)

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.
- 1 stage: indicates which burner parts and pan supports are still hot.

Installation (gas types & measurements)

- Usable for: Nat gas L/LL G25/20mbar(DE)
- NG H/E 20mbar, E+ 20/25mbar Natural gas H 25 mbar (HU) Natural gas L 25 mbar (NL) Liquid gas G30,31 28-30/37mbar Liquid gas G30 37 mbar (PL) Liquid gas 50 mbar
- Factory set for connection to mains gas
- Nozzle set for LPG jets (28-30/37mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 47 x 602 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (490 - 502)
- Min. worktop thickness: 30 mm
- Power cord: 1 m
- Connected load: 7.7 KW

**iQ700, Gas Hob, 60 cm, Ceramic,
Black
ER6A6PD70**

