

**iQ700, Gas Hob, 60 cm, Tempered glass, Black
ER6A6PH40Z**



- ✓ stepFlame Technology: Precise flame control with nine different settings
- ✓ Semi-continuous pan support: Easy to handle and easy to clean
- ✓ Detachable metallic sword knobs: Easily removable for easy cleaning and precise cooking control
- ✓ Illuminated knobs: Instantly recognise when burner is on and its power level
- ✓ Digital display: Monitor heat levels effortlessly, keeping your focus on cooking

HZ32WA00 wireless roastingSensor

Product name/family: gas hob w
integrated controls
 Design: Built-in
 Type of heating: Gas
 Total number of positions that can be used at the same time: 4
 Required niche size for installation (HxWxD):45 x 560-560 x
480-490 mm
 Width of the appliance: 590 mm
 Dimensions: 45x590x520 mm
 Dimensions of the packed product (HxWxD):141x651x578 mm
 Net weight: 17.0 kg
 Gross weight: 18.2 kg
 Residual heat indicator:yes
 Location of control panel: Front
 Basic surface material: Tempered glass
 Color of surface: Black
 Color of frame: Black
 Length electrical supply cord: 100 cm
 EAN code:4242003966839
 Gas connection rating: 7500 W
 Fuse protection:3 A
 Voltage:220-240 V
 Frequency:50; 60 Hz



iQ700, Gas Hob, 60 cm, Tempered glass, Black ER6A6PH40Z

Design

- tempered glass surface, black
- frameless design: install the hob either flush or slightly raised on the worktop
- Cast iron separable w rub feet
- illuminated full metal

Comfort & Convenience

- step valve 9 steps: precisely adjust the flame in nine defined and repeatable levels.
- Electronic power level display: see the selected power level and the residual heat.
- Sword Knobs, front: easily access knobs in front with strong grip for effortless turning.
- Ignition via control dials: just push and turn the knob to ignite the flame.
- Buzzer: an alarm sounds at the end of the time set (e.g. for pasta).

Burners and power

- 4 PC
- Left front: Standard burner up to 1.75 KW (depending on gas type)
- Left rear: Standard burner up to 1.75 KW (depending on gas type)
- Right rear: High speed burner up to 3 KW (depending on gas type)
- Right front: Economy burner up to 1 KW (depending on gas type)

Cleaning

- detachable for easy cleaning between knobs.
- yes for easy cleaning.
- Cast iron separable w rub feet: little weight and compact form, yet high stability due to continuous surface.

Safety

- Flame failure safety device: prevents unwanted gas flow when flame goes out.
- 1 stage: indicates which burner parts and pan supports are still hot.

Connectivity


- yes : check if the hob is switched off even when not at home and find additional functions in the Home Connect app.
- Sound volume of Touch control adaptable to personal preference and needs (via app).

Installation (gas types & measurements)

- Usable for: NG H/E 20mbar, E+ 20/25mbar
- Liquid gas G30,31 28-30/37mbar
- Preset of liquid gas (28-30/37mbar)
- Nozzle set for Natural gas nozzles (20 mbar) included. Nozzles for all other gas types can be ordered via the customer service. For nozzle change, please contact the customer service.
- Dimensions of the product (HxWxD mm): 54 x 590 x 520
- Required niche size for installation (HxWxD mm) : 45 x 560 x (480 - 490)
- Min. worktop thickness: 20 mm
- Power cord 1 m South Africa plug

- Connected load: 7.5 KW

**iQ700, Gas Hob, 60 cm, Tempered glass, Black
ER6A6PH40Z**

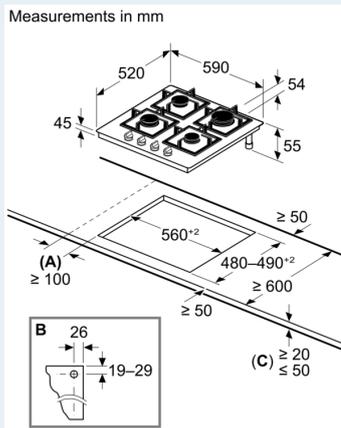

A: Min. distance from the hob cut-out to the wall

B: Position of gas connection in the cut-out

C: With fitted oven underneath possibly more; see space requirements for the oven

For worktop thickness between 12 mm to 20 mm need additional spacer, contact customer service for details